



Bär VanLift FreeAccess – the revolutionary Cargolift

Bär Cargolift –
more than just a taillift

The use of taillifts on panel vans was always limited by the restriction of access to the rear of the vehicle however, not anymore. FreeAccess is the magic word for tail lifts on your Daily. It allows permanent access to the rear of the vehicle but still offers the benefit of a full width taillift by unfolding the platform.

Bär is once again setting new industry standards of functionality, ease of use and stability. Weighing in at only 179 kilos and offering a maximum capacity of 600 kilos the FreeAccess lifts opens a new world of distribution possibilities for both the FreeAccess and standard versions.

VanLift FreeAccess

BC 505A2V

BC 605A2V

VanLift Standard

BC 505S2V

BC 605S2V

IVECO
Daily

 **BÄR**
Cargolift®

Bär VanLift FreeAccess – The Genius

The easy way to deliver



Free, safe access without moving the lift.



Open hydraulically and unfold by hand.



The two-part VanBridge connects the vehicle floor and the platform.
Platform safety with TracGrip and SideGrip.



Enough room for euro pallets and lift trucks. Extremely low approach angle (6.2°). Please keep in mind pallet weight.



Standard: The trolley stop for 4 laundry trolleys or 1 foodstuffs trolley.



Intuitive : Radio-control unit with safety timer.



Emergency control unit.



Bär VanLift Standard.

Basic specifications

Typ	Wheel base mm	VanLift Type	Max loading (kg)
29L	3000L 3300	BC 505A2V BC 505S2V	500
35S	3000L 3300	BC 505A2V BC 505S2V	500
35C ... 50C	3000L 3300 3950	BC 605A2V BC 605S2V	600

At least roof version H2 needed.

Available for steel and air suspension!

Fitting installation does not interfere with original chassis.

Required special accessories

Code	Description	re-com.	re-quir.	N/A
06784	Wooden floor		●	
06767	Double-wing rear doors 270 degrees	●		
00726	Spare wheel between chassis			●
08742	Parktronic			●
07195	Generator*			
06520	Socket with electronic connection**			

* Only required for short distances.

** For ball coupling system;
Standard ball coupling not possible.

Platform dimensions


VanLift	Height (mm)	Width (mm)
FreeAccess, all types	1810	1330
Standard, all types	1810	1380

Platform finish

White aluminium RAL 9006 semi gloss (A2V)
Aluminium nature (S2V)

Special accessories

- Detachable ball coupling (complete)
Daily < 4,6 t towing load: as per original Iveco
Daily 4,6 t towing load: 3,35 t
Daily 5,2 t towing load: 3,0 t
Permitted drawbar load: as per original Iveco, weight: 28 kg
- Emergency control unit

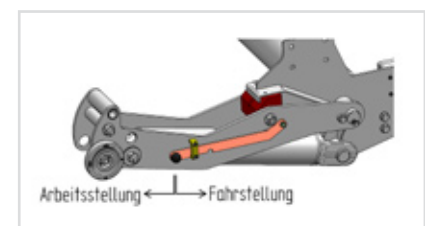

Switch for working and stowing position - manually controlled

Article no. 70.133488
Technical modifications subject to modification. 06/09

Industrial property rights apply

